



CLAIMS

1. A printing process showing no catalytic fading when a dyestuff or a dyestuff
5 mixture of a first step and a second step are brought in contact on a substrate and
having a common overlapping area on said substrate comprising in a said first
step applying at least one dyestuff or a dyestuff mixture selected from the dyes of
the formula (I) or (II) or (IIIa) or (IIIb) or (IV) or (V) or (VI) or (VII) or (VIII) or
(IX) or (X) or (XI)


10

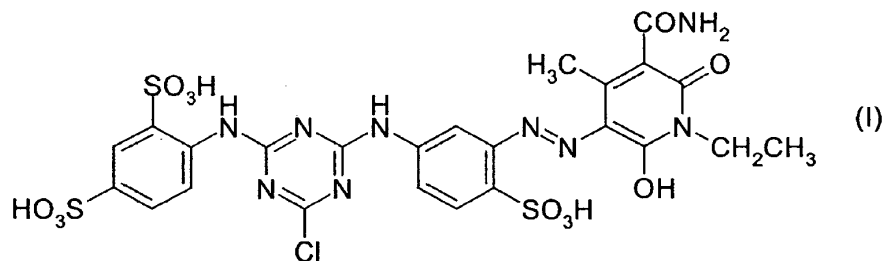

or

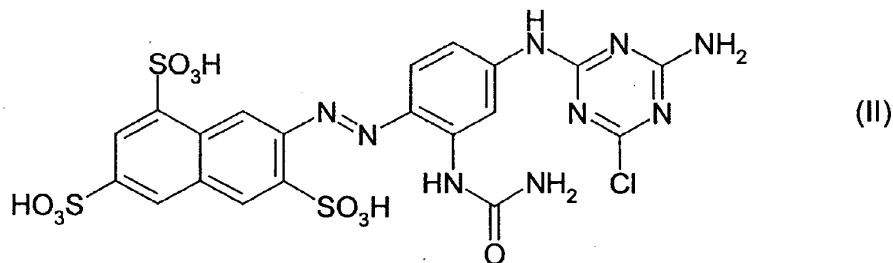


or

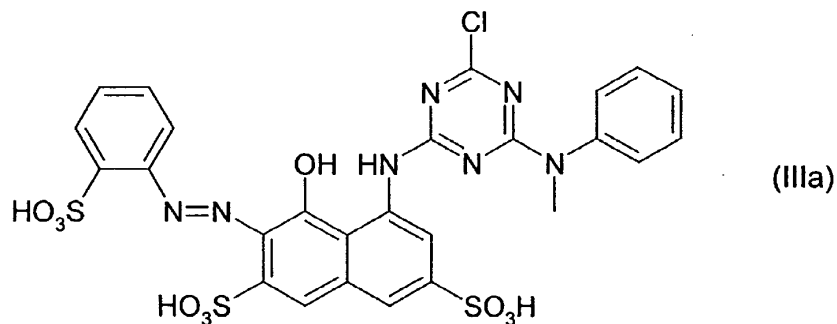


15

or


2

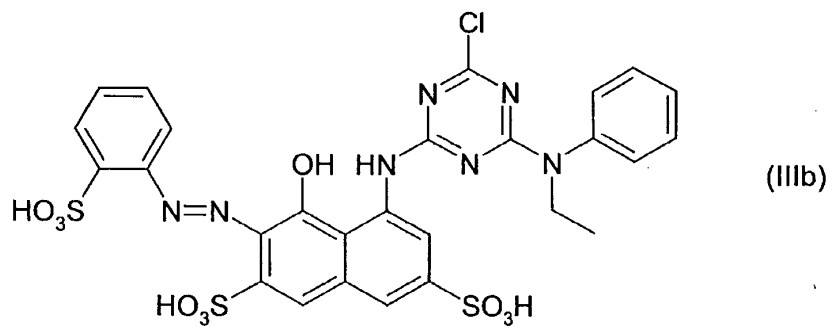

or

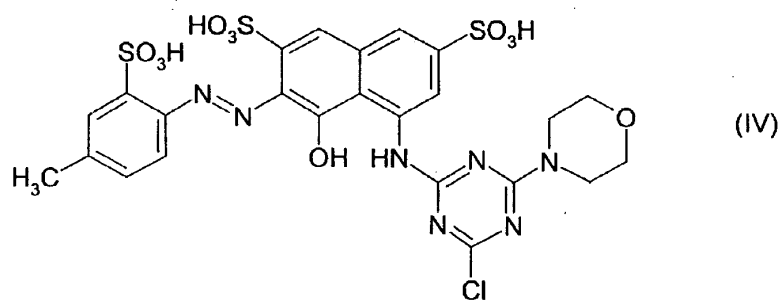


or

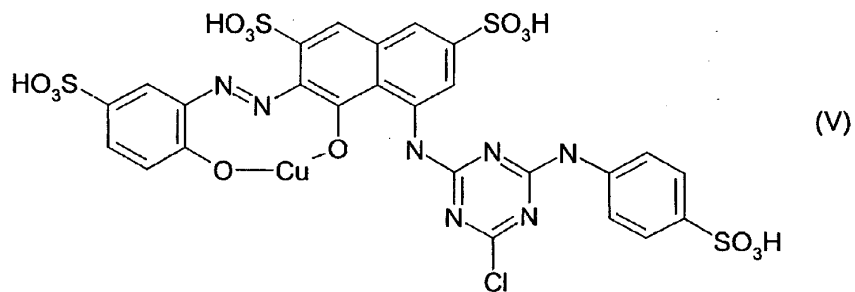


5

or

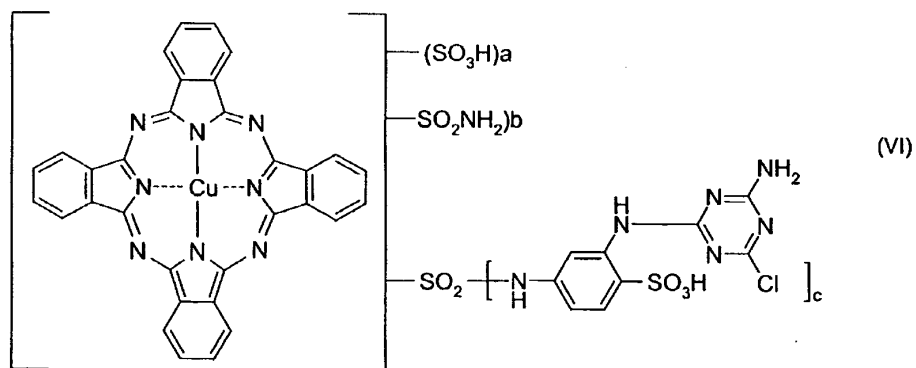


with **a** having values from 4 to 0 and **b** having values from 0 to 4 with the proviso that the sum of **a** + **b** does not exceed 4 and **c** has the values from 1 to 2.

or

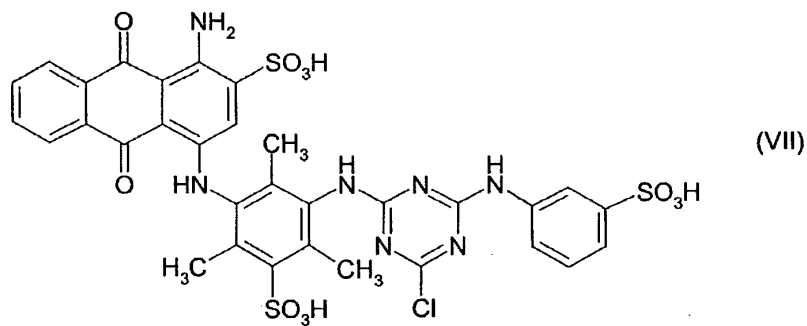


5

or

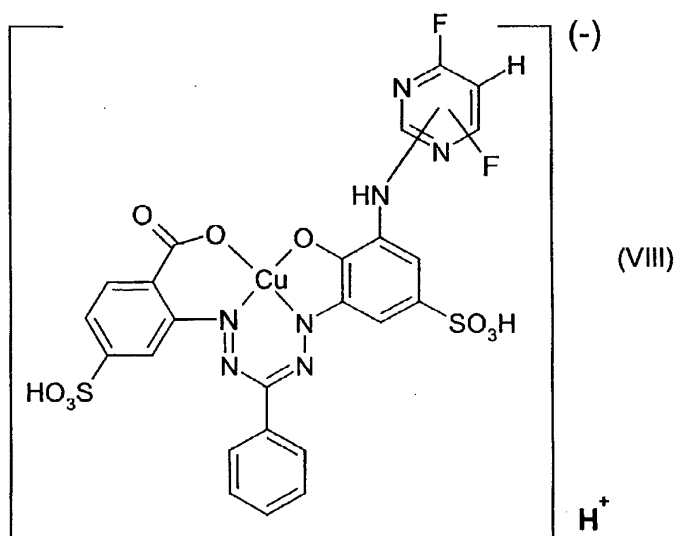


or

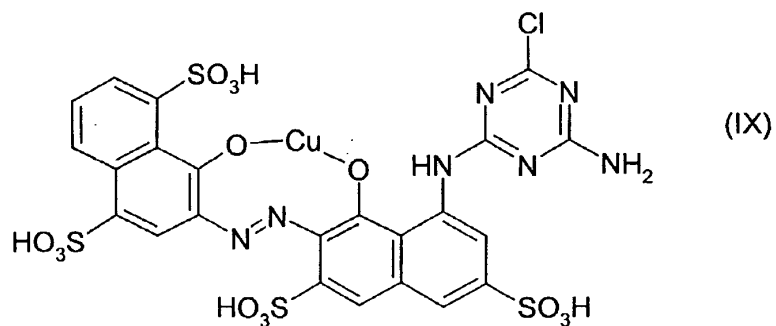

or


dye composition (X) which is a mixture comprising the following three dyestuffs
 (Xa), (Xb) and (Xc)

61 parts of the dye (Xa)

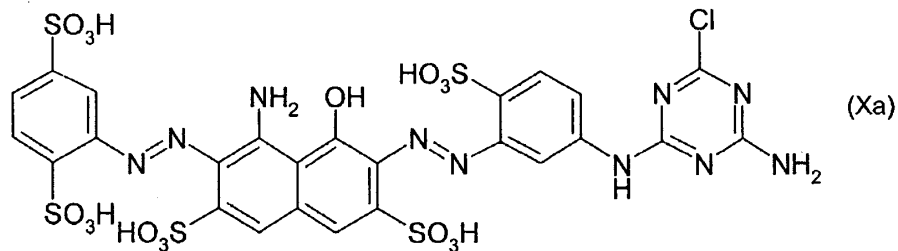

5


28 parts of the dyes (Xb)

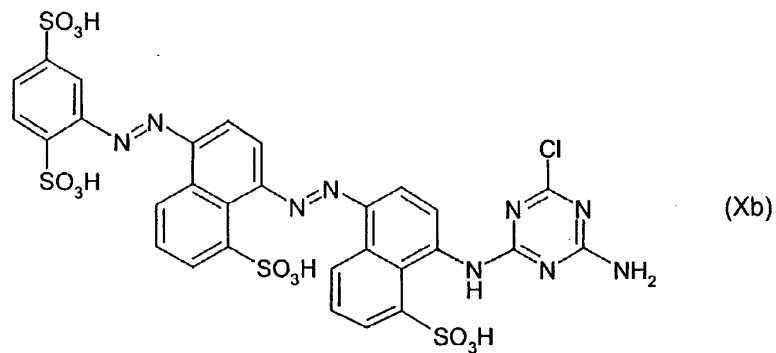

10


and

9 parts of the dye (Xc)

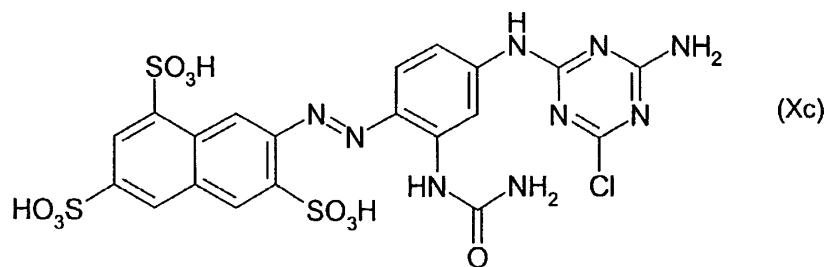

15

or

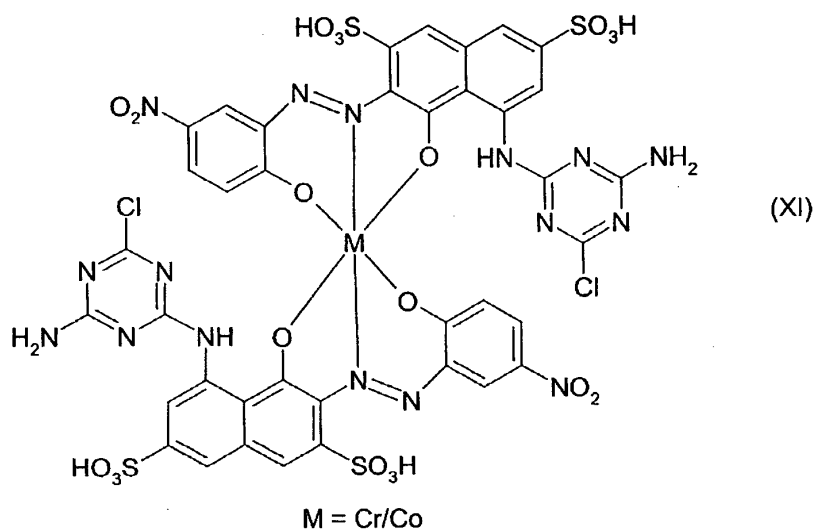

and in said second step applying at least one dyestuff or a dyestuff mixture selected from at dye of the formula (I) or (II) or (IIIa) or (IIIb) or (IV) or (V) or (VI) or (VII) or (VIII) or (IX) or (X) or (XI) with the proviso that the dyestuff or mixture of dyestuffs in the second step is not the same dyestuff or mixture of dyestuff as selected in the first step.

2. A printing process showing no catalytic fading when the dyestuff or a dyestuff mixture of the first and the second and the third step are brought in contact on a substrate and having a common overlapping area on said substrate according to claim 1 characterized in that in a third step a comprises applying at least one dyestuff or a dyestuff mixture selected from at dye of the formula (I) or (II) or (IIIa) or (IIIb) or (IV) or (V) or (VI) or (VII) or (VIII) or (IX) or (X) or (XI) with the proviso that the dyestuff or mixture of dyestuffs in the third step is not the same dyestuff or mixture of dyestuff as selected in the first step or in the second step.
3. A printing process showing no catalytic fading according to claim 1 or 2 characterized in that the printing process is a polychromatic printing process for printing recording materials.

4. A printing process showing no catalytic fading according to claim 1 or 2
characterized in that hydroxy group containing substrates are printed.
- 5 5. A printing process showing no catalytic fading according to claim 1 or 2
characterized in that the printing process is an ink jet printing process
6. A printing process showing no catalytic fading according to claim 1 or 2
characterized in that the total content of salts is less than 0.5% by weight, based
10 on the total weight of the dyes.
7. Use of composition for printing recording materials by the inkjet printing process,
comprising
15
 - 1) at least one dye of the formula (I) or (V) or (VI) or (VIII),
 - 2) water or a medium including a mixture of water and an organic solvent,
an anhydrous organic solvent or a solid having a low melting point,
20
8. Use according to claim 7 characterized in that the composition used according to
claim 7 has a total content of salts less than 0.5% by weight, based on the total
weight of the dyes.
25
9. Use according to claim 7 characterized in that paper and papery substrates, textile
fibre materials and plastic films and plastic transparencies comprising hydroxy
groups are printed.
30
10. Use according to any of the claims 7 characterized in that the printing process is a
ink jet printing process.